



Automatic  
sensor door



Remote  
monitoring



Remote  
monitoring



Odor Disinfection  
& sterilization



Automatic  
sensor door



Remote  
monitoring



Remote  
monitoring




Odor Disinfection  
& sterilization

We Don't Make The Future, We Make The Future Better

**ADLIS/WEIYIN**  
**CORPORATION**

## Assembly and Configuration

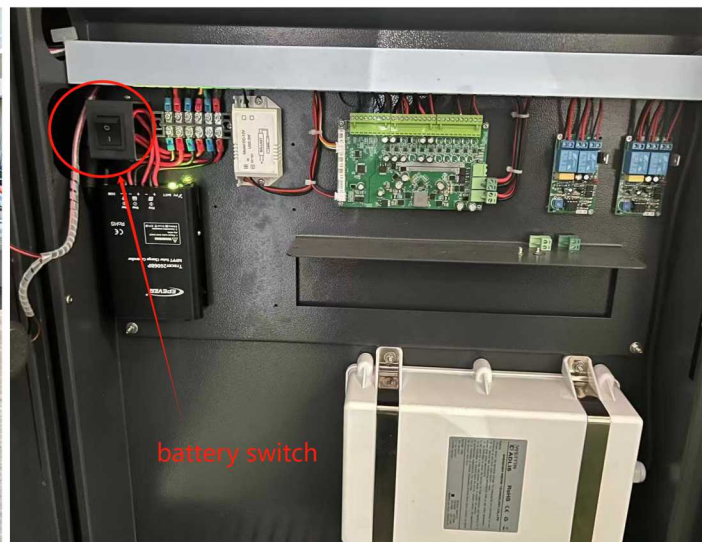

1. After installation, open the maintenance door at the backside, turn on the battery switch.
2. Every time when the device is powered on, the system will do one-minute self check first. During this process, please stay away from the trash bin to avoid affecting the correctness of the program.
3. Don't open the upper motor door without notifying the manufacturer or without a professional engineer on the site.
4. For more help and support, pls contact Adlis/Weiyin team via [sales@solarbenchchina.com](mailto:sales@solarbenchchina.com).

# Function Description

FUNCTION	DESCRIPTION
Automatic door function	When people approach, it will open automatically
	After throwing garbage, it will close automatically.
	When the garbage is full, it will not automatically open.
Automatic door manual handle function	when the battery is of low electricity, and the sensor door doesn't work automatically, manual handle can be used to open the door.
Front door of the inner bin	When the trash is full, the automatic door cannot be opened, the garbage cannot be thrown in, yet the front door can be opened, the inner bin can be taken out to clean the garbage.
	When the compactor starts to work, both the automatic door and the front door are locked and closed.
LED indicator light function	When the trash is full, green indicator light turns to red color.
	When the automatic door opens, green indicator light turns to red color.
Voice broadcast	"The door is opening""The door is closing, watch your hand." The voice board cast is on the moment before the door is opening and closing.
Compression function	When the trash is full, the compactor will work one time automatically, after 5 seconds, the filling level will detect the trash again. If the trash is still full, the automatic door cannot be opened. If the trash is not full, the automatic door can be opened, the garbage can be thrown inside and the compactor will work again until the trash is finally full and cannot be compressed any more.
Compression proportion	During the testing of slightly wet paper, two buckets of paper are compressed into one bucket after compressing 4 times. Notice: the compression proportion is different for different waste type, because carton and plastic easily rebounds.
Disinfection	UV light automatically turns on when the trash is full.
Energy-saving system	During rainy days, the battery is of low voltage, all functions automatically stop working except the automatic sensor door.
Option: Management cloud platform	GPS, location of each bin on google map
	Fire alarm when abnormally high temperature is detected
	Filling level displayed on the platform